


# PRINTED CEILING PANEL

## ATRIBUTOS TECNICOS

SURFACE PRINT	Quiet Print
SURFACE	Ceiling
COMPOSITION	100% Polyester
MATERIAL	FibraSorb
RECYCLED CONTENT	60% min
NRC Rating	0.45 min
THICKNESS	12mm +/- 10%   0.47" +/- 10%
DIMENSIONS	1200mm x 2800mm   48"x110"
FIRE TESTS	AS ISO9705: 2003 Group 1, ASTM E84-17a Class A, ISO 3705: 1993 Group1

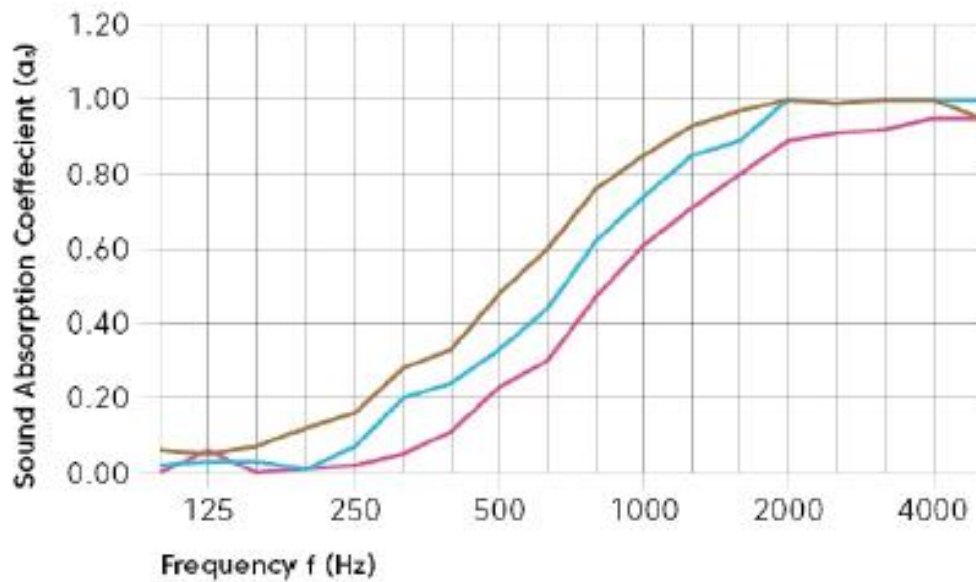

\*Graph not to scale.

Frequency (Hz)	125	250	500	1000	2000	4000	NRC
α <sub>1</sub> no air gap	0.06	0.02	0.23	0.61	0.89	0.95	<b>0.45</b>
α <sub>2</sub> 12mm air gap	0.03	0.14	0.33	0.74	1.00	1.00	<b>0.54</b>
α <sub>3</sub> 20mm air gap	0.05	0.16	0.48	0.85	1.00	1.00	<b>0.64</b>



Declare.